


超微粒鎢鋼鋸片
Solid carbide slitting saws

Type 1101

細齒
fine teeth

DIN 1837

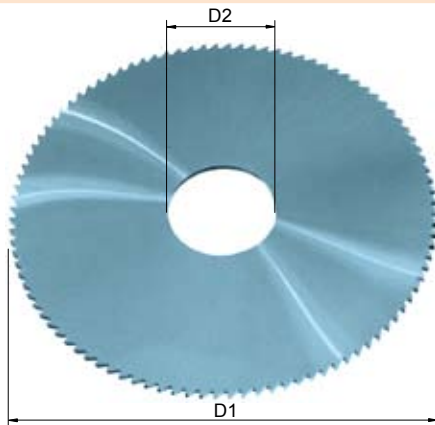

需鍍層請另詢
Coating on request


| D1 | 15 | 20 | 25 | 30 | 40 | 50 | 63 | 80 | 100 | 125 |
|----------------------------|-----------------------|----|----|-----|-----|-----|-----|-----|-----|-----|
| D2 H7 | 5 | 5 | 8 | 8 | 10 | 13 | 16 | 22 | 22 | 22 |
| 厚度 thickness +/-0.01 | 齒數 number of teeth | | | | | | | | | |
| 0.10 | 64 | 80 | 80 | 100 | 128 | | | | | |
| 0.15 | 64 | 80 | 80 | 100 | 128 | | | | | |
| 0.20 | 64 | 80 | 80 | 100 | 128 | 128 | 160 | | | |
| 0.25 | 64 | 64 | 80 | 100 | 100 | 128 | 128 | 160 | | |
| 0.30 | 64 | 64 | 80 | 80 | 100 | 128 | 128 | 160 | | |
| 0.35 | 64 | 64 | 64 | 80 | 100 | 100 | 128 | 160 | | |
| 0.40 | 64 | 64 | 64 | 80 | 100 | 100 | 128 | 160 | | |
| 0.45 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | | |
| 0.50 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | 160 | |
| 0.60 | 48 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 | 160 |
| 0.70 | 48 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | 160 |
| 0.80 | 40 | 40 | 48 | 64 | 80 | 80 | 100 | 128 | 128 | 160 |
| 0.90 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 |
| 1.00 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 | 160 |
| 1.10 | 40 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 |
| 1.20 | 40 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 | 128 |
| 1.30 | 40 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | |
| 1.40 | 40 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 |
| 1.50 | 40 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 |
| 1.60 | 40 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 | 128 |
| 1.70 | 40 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | |
| 1.80 | 40 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 |
| 1.90 | 40 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | |
| 2.00 | 40 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 | 128 |
| 2.50 | 40 | 32 | 40 | 40 | 48 | 64 | 64 | 80 | 100 | 100 |
| 3.00 | 40 | 32 | 32 | 40 | 48 | 48 | 64 | 80 | 80 | 100 |
| 3.50 | 24 | 24 | 32 | 40 | 40 | 48 | 64 | 64 | 80 | 100 |
| 4.00 | 24 | 24 | 32 | 40 | 40 | 48 | 64 | 64 | 80 | 100 |
| 5.00 | 24 | 24 | 32 | 32 | 40 | 48 | 48 | 64 | 80 | 100 |
| 6.00 | 24 | 24 | 24 | 32 | 40 | 40 | 48 | 64 | 64 | 100 |

超微粒鎢鋼鋸片
Solid carbide slitting saws

Type 1102

粗齒
large teeth

DIN 1838

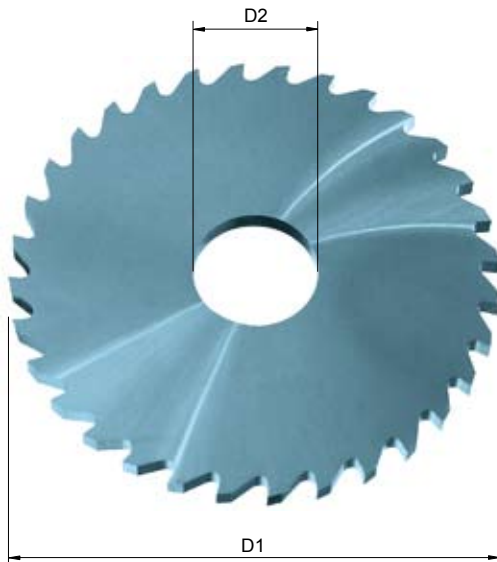


| D1 | 15 | 20 | 25 | 30 | 40 | 50 | 63 | 80 | 100 | 125 |
|----------------------------|-----------------------|----|----|----|----|----|----|----|-----|-----|
| D2 H7 | 5 | 5 | 8 | 8 | 10 | 13 | 16 | 22 | 22 | 22 |
| 厚度 thickness +/-0.01 | 齒數 number of teeth | | | | | | | | | |
| 0.20 | 20 | 20 | 20 | 30 | 40 | | | | | |
| 0.25 | 20 | 20 | 20 | 30 | 40 | | | | | |
| 0.30 | 20 | 20 | 20 | 30 | 40 | | | | | |
| 0.40 | 20 | 20 | 20 | 30 | 40 | 48 | 64 | | | |
| 0.50 | 20 | 20 | 20 | 30 | 40 | 48 | 64 | | | |
| 0.60 | 20 | 20 | 20 | 30 | 40 | 48 | 48 | 64 | 80 | |
| 0.70 | 20 | 20 | 20 | 30 | 40 | 40 | 48 | 64 | 64 | |
| 0.80 | 20 | 20 | 20 | 24 | 32 | 40 | 48 | 64 | 64 | 80 |
| 0.90 | 20 | 20 | 20 | 24 | 32 | 40 | 48 | 48 | 64 | 80 |
| 1.00 | 20 | 20 | 20 | 24 | 32 | 40 | 48 | 48 | 64 | 80 |
| 1.20 | 20 | 20 | 20 | 24 | 32 | 40 | 40 | 48 | 64 | 64 |
| 1.50 | 20 | 20 | 20 | 24 | 32 | 32 | 40 | 48 | 48 | 64 |
| 1.60 | 20 | 20 | 20 | 24 | 32 | 32 | 40 | 48 | 48 | 64 |
| 1.80 | 20 | 20 | 20 | 24 | 24 | 32 | 40 | 40 | 48 | 64 |
| 2.00 | 20 | 20 | 20 | 24 | 24 | 32 | 40 | 40 | 48 | 64 |
| 2.50 | 20 | 20 | 20 | 24 | 24 | 32 | 32 | 40 | 48 | 48 |
| 3.00 | 20 | 20 | 20 | 24 | 24 | 24 | 32 | 40 | 40 | 48 |
| 4.00 | 20 | 20 | 20 | 24 | 20 | 24 | 32 | 32 | 40 | 48 |
| 5.00 | 20 | 20 | 20 | 24 | 20 | 24 | 24 | 32 | 40 | 40 |
| 6.00 | 20 | 20 | 20 | 24 | 20 | 20 | 24 | 32 | 32 | 40 |

需鍍層請另詢
Coating on request

超微粒鎢鋼鋸片
Solid carbide slitting saws

Type 1103

超細齒
extra fine teeth

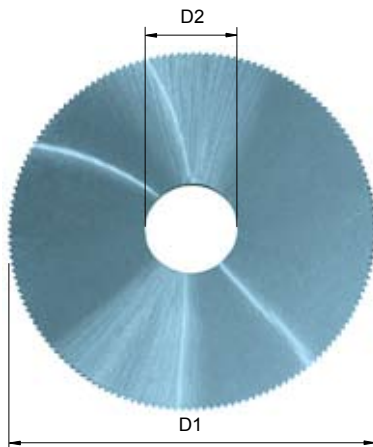

適用易脆材料或薄壁工件加工

建議用於自動車床

for machining of fragile or thin workpieces

recommended on automatic lathes

| D1 | 8 | 10 | 12 | 15 | 20 | 20 | 20 | 25 | 25 | 25 | 30 | 32 |
|----------------------------|-----------------------|----|----|----|----|-----|----|----|-----|-----|-----|----|
| D2 H7 | 3 | 3 | 5 | 5 | 5 | 5 | 6 | 5 | 6 | 8 | 8 | 8 |
| 厚度 thickness +/-0.01 | 齒數 number of teeth | | | | | | | | | | | |
| 0.10 | 48 | 64 | 64 | 80 | * | 100 | 80 | 80 | | | | |
| 0.15 | 48 | 64 | 64 | 80 | * | 100 | 80 | 80 | 100 | 100 | * | 80 |
| 0.20 | 48 | 64 | 64 | 80 | * | 100 | 80 | 80 | 100 | 100 | * | 80 |
| 0.25 | 48 | 64 | 64 | 80 | 80 | 100 | 80 | 80 | 100 | 100 | * | 80 |
| 0.30 | 48 | 64 | 64 | 80 | 80 | 100 | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.35 | 48 | 64 | 64 | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.40 | 48 | 64 | 64 | 80 | 80 | 100 | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.50 | 48 | 64 | 64 | 80 | 80 | 100 | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.60 | 48 | 64 | 64 | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.70 | 48 | 64 | 64 | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.80 | 48 | 64 | 64 | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 0.90 | 48 | 64 | 64 | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 1.00 | 48 | 64 | 64 | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 1.20 | | | | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 1.50 | | | | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 2.00 | | | | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 2.50 | | | | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |
| 3.00 | | | | 80 | 80 | | 80 | 80 | 100 | 100 | 100 | 80 |

參閱型號 1101
*=see type 1101

需鍍層請另詢
Coating on request